

PORTABLE FILTRATION SYSTEM

High Performance Filtration for Today's Industry

360 GPH

Contact us today for pricing 800.487.7493 Filters@FilterMart.com



APPI ICATIONS

Hydraulic Oil • Compressor Oil • Quench Oil EDM Oil • Lubricating Oil • Insulating Oil Turbine Oil • Gear Oil • Water Glycol Fluids **Water Based Coolants**

SPECIFICATIONS

- 3/4 HP TEFC Heavy Duty Motor with Thermal Overload Protection.
- 8 GPM Positive Displacement Gear Pump with Internal Relief Valve.
- Two (2) Polyurethane Powder Baked 51-0001 Element Housings.
- Wired 110 Volt, 1 Phase with all electrical components mounted in a NEMA 4 enclosure.
- Automatic High/Low Pressure Shutdown System for unattended operation.
- 0-100 PSI Glycerin Filled Gauge for monitoring system pressure.
- Plumbed with 3/4" fittings and 1" stainless steel
- 3/4" inlet and 3/4" outlet with ball valves provided to isolate unit for element change.
- Two (2) 15 ft. 3/4" inlet and outlet hydraulic hoses with hose ends.
- Fifteen (15) feet of Heavy Duty 12/3 Power Cable.
- Manufactured with 3-way ball valve for Fluid Transfer System and to allow for adding makeup oil.
- Suction-Wye Strainer to protect pump from large
- Heavy-Duty 10" Pneumatic Tires.
- Filtration Capacity of 6.5 GPM and Fluid Transfer Capacity of 8 GPM.




REDUCE MAINTENANCE, EXTEND OIL AND EQUIPMENT LIFE

REDUCING YOUR COSTS TODAY TO INCREASE YOUR PROFITS TOMORROW

MODEL 51-0015

Portable Oil Filtration System for Lubricating Oils and Fluid Power Systems

360 GPH

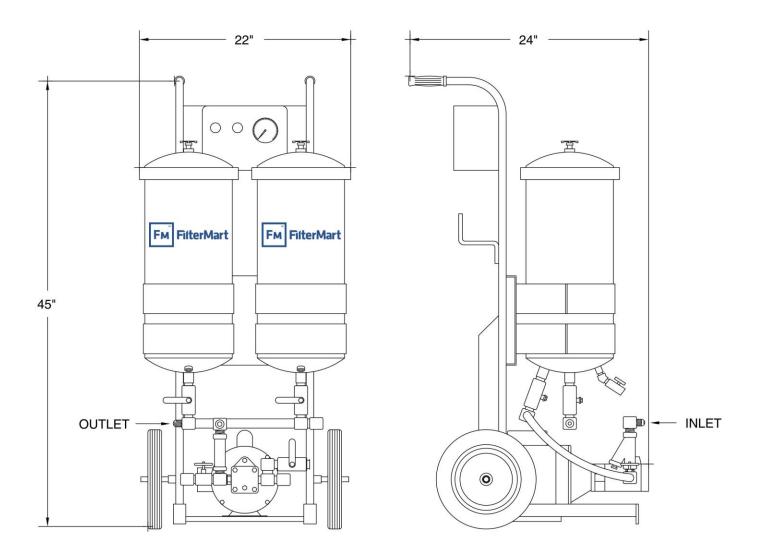

Unit Weight: 200 lbs. Shipping Weight: 260 lbs. (weights are approximate)