

FILTER-MART

C O R P O R A T I O N

HIGH PERFORMANCE

ABSOLUTE RATED SPIN-ON FILTERS


FOR PALL HYDRAULICS®



FILTER-MART CORPORATION
P.O. BOX 1327 COOKEVILLE, TN 38503-1327
PHONE 800-487-7493 800-669-6303
EMAIL: FILTERS@FILTERMART.COM

ABSOLUTE RATED SPIN-ON FILTERS

FILTER-MART keeps spin-on filters in stock for you.

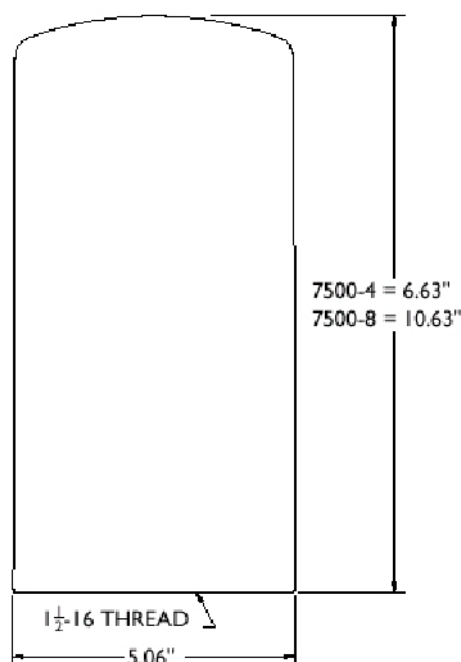

Temperature Range: -20 F to +225F

Max Working Pressure: 200 psi

Fatigue Pressure Rating: 200 psi
(100,000 cycles 0 - 200 psi)


Typical Burst Pressure: 290 psi

Element collapse: 100 psid


Seals: Buna-N nitrile, 2 sizes provided

Mounting Thread: 1 1/2" - 16UN

7500-4

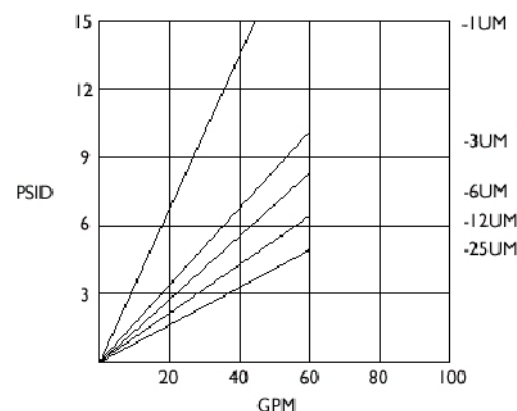

7500-8

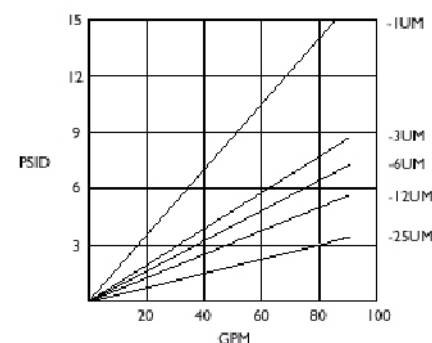

Pressure drops calculated with 150 sus, 0.9 SG fluid.
Pressure drop varies directly with absolute viscosity.

Removal Rating ISO 4572

Grade	$\beta_x > 200$
1	1 μ m
3	3 μ m
6	6 μ m
12	12 μ m
25	25 μ m

Removal Rating – ISO 16889

Grade	μ m(c) Rating for Beta Value					
	2	10	75	100	200	1000
1	<2	<2	<2	<2	2.0	2.5
3	<2	<2	3.1	3.3	3.8	5
6	2.1	3.4	5.0	5.2	5.7	7
12	3.2	5.5	8.3	8.7	9.7	12
25	7.2	11.0	15.8	16.5	18.2	22

CROSS-REFERENCE SAMPLE

PALL®

HC7400SKP4H
HC7400SKN4H
HC7400SKS4H
HC7400SKT4H
HC7400SKP8H
HC7400SKN8H
HC7400SKS8H
HC7400SKT8H

FILTER-MART

F7400-4K3B
F7400-4K6B
F7400-4K12B
F7400-4K25B
F7400-8K3B
F7400-8K6B
F7400-8K12B
F7400-8K25B

PALL®

HC7500SKP4H
HC7500SKN4H
HC7500SKS4H
HC7500SKT4H
HC7500SKP8H
HC7500SKN8H
HC7500SKS8H
HC7500SKT8H

FILTER-MART

F7500-4K3B
F7500-4K6B
F7500-4K12B
F7500-4K25B
F7500-8K3B
F7500-8K6B
F7500-8K12B
F7500-8K25B

*** COMPANIES NAMED ABOVE CARRY A REGISTERED TRADEMARK.

FILTER-MART CORPORATION
P.O. BOX 1327 COOKEVILLE, TN 38503-1327
PHONE 800-487-7493 800-669-6303
EMAIL: FILTERS@FILTERMART.COM